# ***Giro Minimo - Installation Instructions:***

**Drill a Ø 7.5 mm hole using a wood drill bit**

1. **Remove the insert plate**
   Remove the insert plate **from the exterior side of the knob (the spindle side).**
   Use your finger to push out the round magnetic plate.

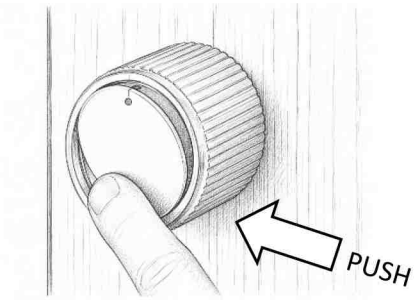


Remove the insert plate.

(Push out the insert plate at the 4 o'clock or 10 o'clock position.)

2. **Install and secure the knobs**
   Insert the knob with the square spindle through the lock follower. Fit the knob on the opposite side and tighten the supplied M4 machine screws evenly until securely fastened.
   **Important for the lockable version:**
   - Before assembling the components, ensure that the locking tongue is in the horizontal position.
   - Position the small locking bolt horizontally.

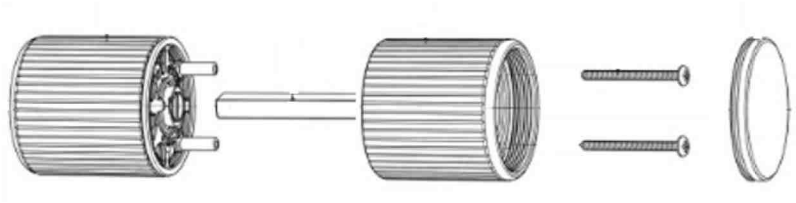

3. **Perform a function test**

griffwelt