X LOCK
Unlock your imagination.

// XLOCK 140

LOCKER LOCK WITH NFC, BLE AND PIN CODE

The XLOCK 140 is an all-rounder. The unlocking and locking is possible with 3 different methods (parallel):

1 # BLE with smartphone
2 # NFC / RFID transponders
3 # PIN code

Up to 200 different IDs and PIN codes can be programmed using the XLOCK app. There are also temporary PIN codes. These work “once” or “24 hours”. The temporary PIN code expires automatically. A standard USB socket is installed for emergency supply.

Compatibel Systems:

BLE + NFC, Hotel, Proxy Pincode

Power supply:

3 Volt Battery (optional: power connection)

// THE XLOCK APP

- A single Swipe to unlock your XLOCK.
- Use your already existing NFC company card to access.
- Choose your way of access: PIN Code Sharing, NFC unlocking or Smartphone unlocking via BLE.
- Easy handling and setting up of a new XLOCK.
- Grant access to other user via the XLOCK App.
- With a Gateway you can unlock your storage from anywhere in the world.
- Real time reporting: Access the activity logs at any time and see who accessed the XLOCK at what time.
- Decide who has access. Anytime and anywhere. There is no need for guests to download the XLOCK app to receive PIN codes. Simply share the Pin code via WhatsApp, SMS and E-Mail.

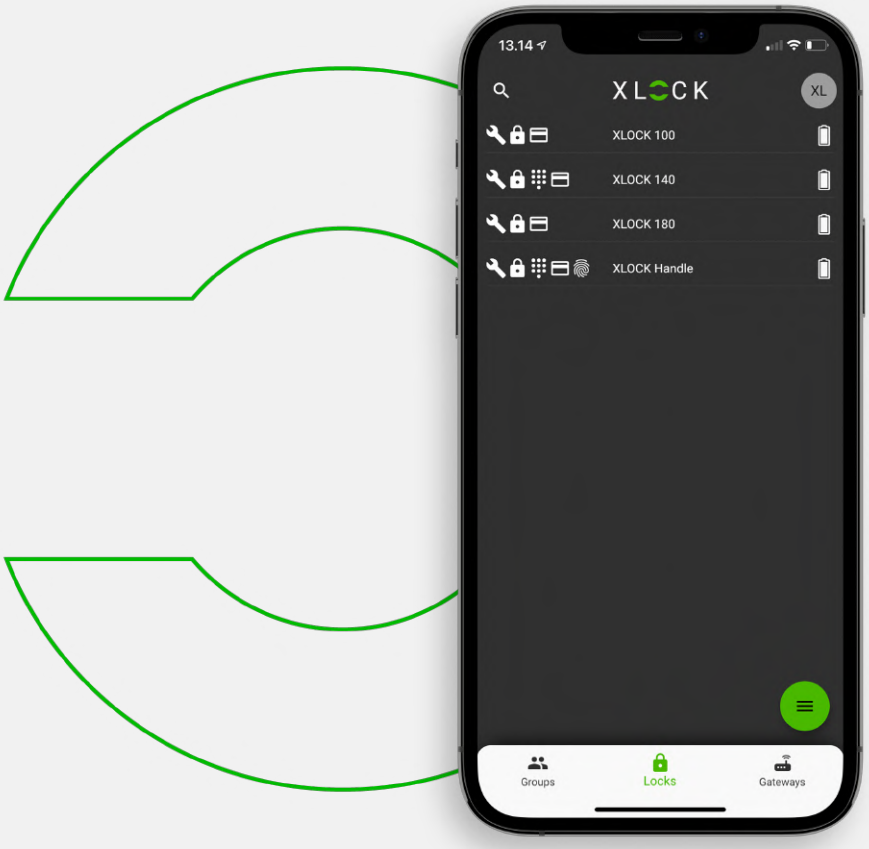

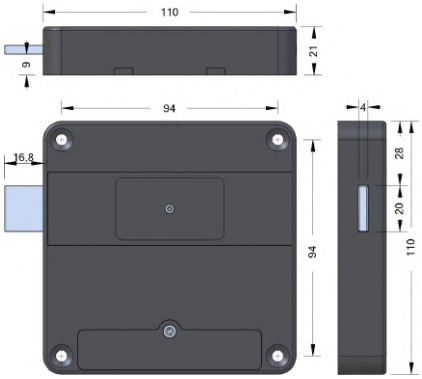

LOCK UNIT



LOCK PLATE

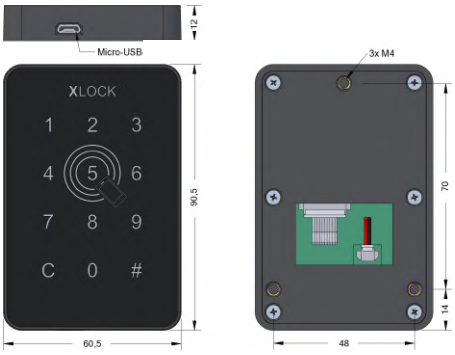

ANTENNA & KEY PAD

// Technical specifications

Size	lock unit: 110 x 110 x 21 mm lock plate: 30 x 16 x 10 mm key pad: 70 x 60,5 x 12 mm
Weight	App. 300 g (set including lock plate, battery and screws)
Temperature surrounding	-10 °C to +55 °C (14 °F to 131 °F) (depending on electronic and RFID frequency)
Humidity	20% to 75% relative humidity, non- condesing
Reading field frequency	13.56 MHz
Battery	Requires XLOCK battery (Lithium) in order to live up to the specification for battery life and software.
Battery lifetime	Up to 2 years at +20 °C (68 °F) (depending on electronic, lock, frequency of use and used functions)
Frequency Standard	BLE 4.0, ISO14443a, NFC
Compatible with	MIFARE® and ISO 14443A: MIFARE Classic® 1K and 4K, MIFARE Ultralight®, MIFARE® Mini, MIFARE Plus®, MIFARE® DESFire®, LEGIC® advant ATC2048 and many more
Number of users	Up to 200 RFID Users, unlimited Smartphone User
Reading field range	5 to 35 mm (0.2´´ to 1.38´´) (depending on RFID Transponder Quality, electronic type, antenna position, furniture material and mounting) Up to 15 m with BLE unlocking
Data storage:	EEPROM for 999 bookings, data preservation during battery change (depending on electronic)
Internal clock	Quartz-controlled, real-time clock (depending on electronic)

LET'S UNLOCK THE FUTURE TOGETHER!

Get in contact with one of our distribution partners for more information.