Europe development & distribution:

Cascoo Europe GmbH
Lütke Haar 13
59602 Rüthen
Germany
Tel.: 0049 (0) 2952 9706290
E-Mail: info@cascoo.eu
Internet: www.cascoo.eu

China manufacturing base:

Zhongshan Cascoo Metal Machinery Co., Ltd:
Address: Building 1# No.1 Yiming north road, Baofeng District,
Xiaolan Town, Zhongshan, Guangdong, China
Post code: 528415
TEL: +86 (0)760 89821559
FAX: +86 (0)760 89821556
EMAIL: sales@cascoo.com
Internet: www.cascoo.com

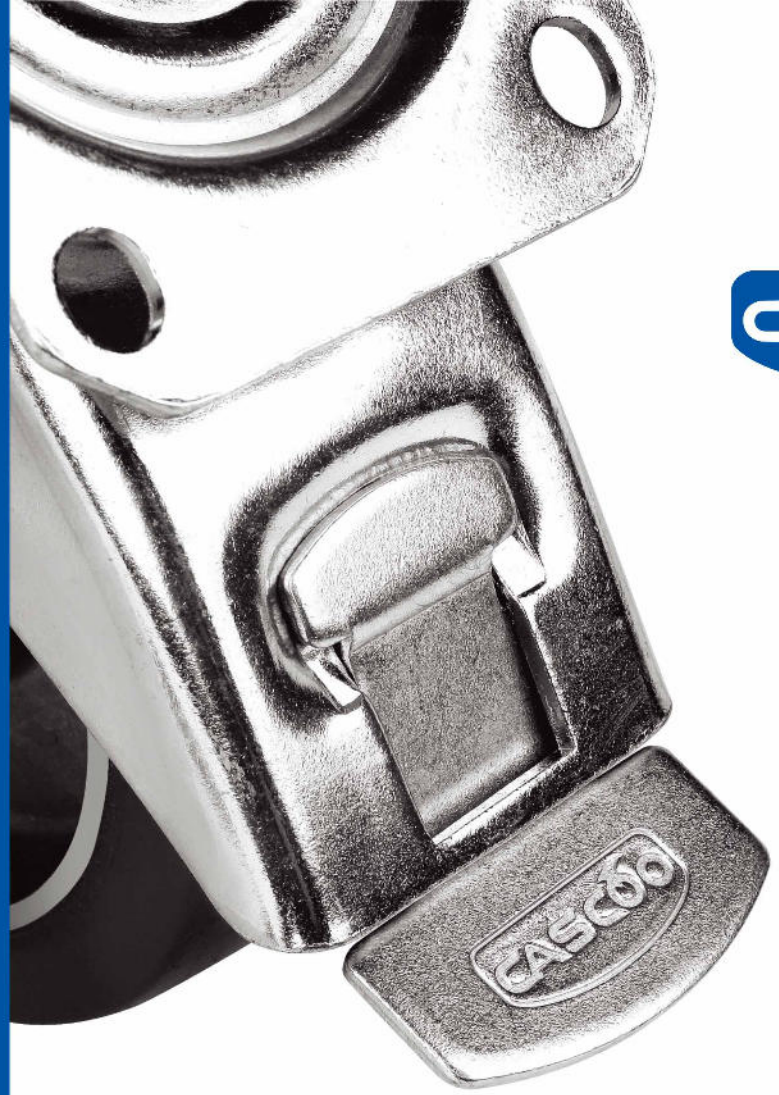

2015 product line

We Move Your Life

WE MOVE YOUR LIFE

Wheels are born to move the world.
We, Cascoo, make it possible to move your life.

CASCOO

The Catalog Index

pursuing excellent
and fashionable life

03 / Page
Company introduction


09 / Page
Production line


13 / Page
Apparatus castors

25 / Page
Transport castors
CASCOO PREMIUM

55 / Page
Castors for shopping trolleys

59 / Page
Heavy duty castors

63 / Page
Castors for waste bins

69 / Page
Item no.Declaration

We make We care!

CASCOO castor is just like our child for whom we care and are responsible for. Look and see how our castors will be an important component part of your craft and find therefore our pursuit of perfection. CASCOO castors won´t desert you anytime. If you need us we will always be there. We move your life!

company introduction

CASCOO is a professional manufacturer of castors and wheels. The manufacturing base is located in the most famous metal base and castor production center in China. The sales and distribution center is located in Rüthen, Germany. Furthermore, there is an ever-growing warehouse also at the German facility, which is advantageous for short delivery times within Europe. Since establishment, the corporate philosophy of CASCOO is to keep credibility and professionalism to offer our valued customers just high qualitative products and excellent service.

CASCOO Europe GmbH, Rüthen

Important for the competitiveness of the individual is the ability for learning.

Quality is life

Quality is life" is not just a motto for us. It is also responsibility and commitment! Each process from incoming material to the finished product is critically controlled. Any problem during the production process can be detected and solved directly. All our products have to be tested to EN and CASCOO internal standards. A long endurance and usability is the result of our internal stringent quality inspection system.

We work as partners but think as a team. You move us forward

More than 10 years of industry experiences makes our engineers very familiar with the particular strengths of each product, the pros and contras of certain material and the technical variants. For any enquiry our engineer will always manage to respond quickly and find the optimum with the most economical solution. Every technical communication with our customers inspires our engineers to be more innovative and accountable next time. It is our valued customer that moves us forward.

Brand concept

CASCOO is an ambitious international enterprise for castors and wheels with several locations. The manufacturing base is located in China, the location for sales and distribution is in Germany and, furthermore, there are distribution companies throughout Europe.
CASCOO stands in equal parts for Castor and Cooperation. Cooperation in general means working together. For us a good cooperation means more than that: Cooperation means sharing passion, ideas and the sense for a successful craft. It also requires respect and mutual trust, whether it's within a company or in relationship with customers.

"Coming together is a beginning. Keeping together is progress. Working together is success."Henry Ford

Let CASCOO be the perfect cooperation partner for your venture. Let CASCOO move your life!

Move easier, quieter and smarter

wheel bearings: the key to the mobility

With the inside bearing each castor or wheel becomes alive. In addition to the tread and the wheel center, mobility mostly depends on the wheel bearing. No doubt an ideal wheel bearing influences the performance of every castor. Three types of bearing are available for your opinion: plain bearing, roller bearing and precision ball bearing. The relevant bearing depends on the castors performance.

plain bearing

The plain bearing is the simplest bearing providing an excellent lubrication and maintenance free. It is applicable for light duties or small and low handling wheels.

roller bearing

Made of carbon steel with diameter respectively 4mm and 5mm, the roller axle is mostly used for industrial applications. Roller bearing features high load capacity and low roll resistance.

precision ball bearing

The precision ball bearing is composed of a fixed one-race ball bearing supporting axial and medium weight radial loads. Seal shielding is flexible for assembling. It is affordable for high rotation speed and heavy load capacity.

single ball bearing

Production Line

The order is very urgent. Do you think you can execute the order?" Yes, we can! We can make it possible due to our automatic production line and our prescheduled logistic. A streamlined production process is possible by modern machines and well-tuned planning. High production capacity ensures every shipment on time without degradation. At CASCOO each order is a challenge and a promise to our customers.

Hydraulic molding machine

Injection molding machine

Rubber mixing machine

Vulcanizing machine

Running Performance Test

Hardness Test

Brake Test

the leading research and development technology

No matter what we made, innovation is the driving force of our progress. We successfully created and experienced the development of any new products and technology. Many innovative experiences enable us to maintain a high level of competence.

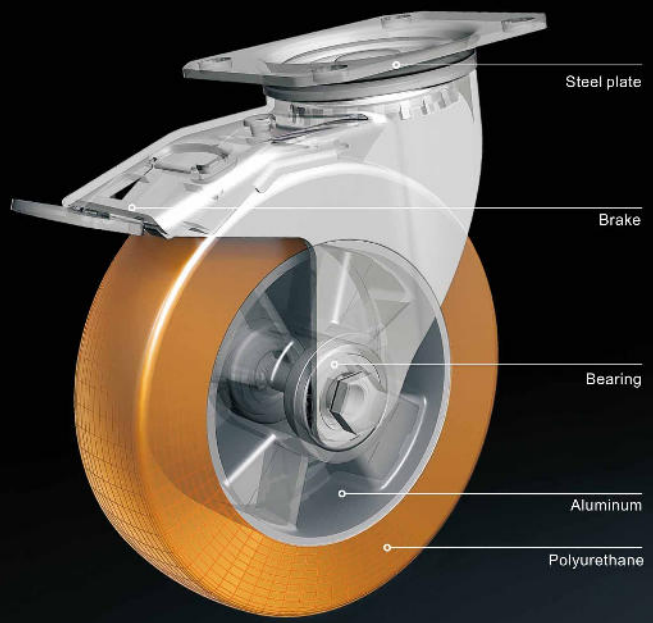

Each view of design superb

As you see

Perfect design
Slim look
Smooth running
Excellent durability

You are the direction for mobility

We treat every detail to the ultimate perfection as the starting point of innovation, carrying everything possible.

apparatus castors

Special design, specific use

We classified this group as apparatus castors. They can be found at medical centers, logistic centers and in the hotel sector. Special design, various wheel diameters and excellent tread feature this group.

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
plain bearing
without threadguards
hardness:shore A 95

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 95

swivel castor		mm	mm	mm	mm	mm	mm	Kg
SAPA9C0050P2T2P0N	=	050	60X60	48/39X48/39	6.3	25	70	50
SAPA9C0050P2T2B42		050	60X60	48/39X48/39	6.3	25	70	50

fixed castor		mm	mm	mm	mm	mm	Kg
FAPBCC0050P2T2P0N	=	050	55X55	44/38.5X44/38.5	6.3	70	50
FAPBCC0050P2T2B42		050	55X55	44/38.5X44/38.5	6.3	70	50

swivel castor with total brake		mm	mm	mm	mm	mm	mm	mm	Kg
TAPA9C0050P2T2P0N	=	050	60X60	48/39X48/39	6.3	25	70	80	50
TAPA9C0050P2T2B42		050	60X60	48/39X48/39	6.3	25	70	80	50

wheel only		mm	mm	mm	mm	Ø	Kg
050P2T2P0N	=	050	19	22	8	M6	50
050P2T2B42		050	19	22	10	M6	50





Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
plain bearing
without threadguards
hardness:shore A 95

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 95

swivel castor with bolt hole		mm	mm	mm	mm	Kg
HAH19C0050P2T2P0N	=	050	11	25	70	50
HAH19C0050P2T2B42		050	11	25	70	50

swivel castor with bolt hole total brake		mm	mm	mm	mm	mm	Kg
BAH19C0050P2T2P0N	=	050	11	25	70	80	50
BAH19C0050P2T2B42		050	11	25	70	80	50

swivel castor with bolt hole		mm	mm	mm	mm	mm	Kg
HAZ19C0050P2T2P0N	=	050	11	11x31	25	70	50
HAZ19C0050P2T2B42		050	11	11x31	25	70	50

swivel castor with bolt hole total brake		mm	mm	mm	mm	mm	mm	Kg
BAZ19C0050P2T2P0N	=	050	11	11x31	25	70	80	50
BAZ19C0050P2T2B42		050	11	11x31	25	70	80	50



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber ,dark grey
plain bearing
without threadguards
hardness:shore A 95

swivel castor		mm	mm	mm	mm	mm	mm		Kg
SAPA2C0075P2T2P0N	=	075	60X60	48/38X48/38	6.3	24	100		75
SAPE5C0100P2T2P0N	=	100	77X67	61.5/56X51.5/46.5	8.5	37	135		100
SAPE5C0125P2T2P0N	=	125	77X67	61.5/56X51.5/46.5	8.5	40	160		100
SAPJ5C0125P2T2P0N	=	125	95X70	75X50	11	40	160		100
SAPE5C0150P2T2P0N	=	150	77X67	61.5/56X51.5/46.5	8.5	40	185		100

fixed castor		mm	mm	mm	mm		mm		Kg
FAPCCC0075P2T2P0N	=	075	67X60	48/38X48/38	6.3		100		75
FAPE5C0100P2T2P0N	=	100	77X67	61.5/56X51.5/46.5	8.5		135		100
FAPE5C0125P2T2P0N	=	125	77X67	61.5/56X51.5/46.5	8.5		160		100
FAPJ5C0125P2T2P0N	=	125	95X70	75X50	11		160		100
FAPE5C0150P2T2P0N	=	150	77X67	61.5/56X51.5/46.5	8.5		185		100

swivel castor with total brake (aluminium pedal)		mm	mm	mm	mm	mm	mm	mm	Kg
TAPA2C0075P2T2P0N	=	075	60X60	48/38X48/38	6.3	24	100	80	75
TAPE5C0100P2T2P0N	=	100	77X67	61.5/56X51.5/46.5	8.5	37	135	132	100
TAPE5C0125P2T2P0N	=	125	77X67	61.5/56X51.5/46.5	8.5	40	160	132	100
TAPJ5C0125P2T2P0N	=	125	95X70	75X50	11	40	160	132	100
TAPE5C0150P2T2P0N	=	150	77X67	61.5/56X51.5/46.5	8.5	40	185	132	100

swivel castor with total brake (plastic pedal)		mm	mm	mm	mm	mm	mm	mm	Kg
PAPE5C0100P2T2P0N	=	100	77X67	61.5/56X51.5/46.5	8.5	37	135	132	100
PAPE5C0125P2T2P0N	=	125	77X67	61.5/56X51.5/46.5	8.5	40	160	132	100
PAPJ5C0125P2T2P0N	=	125	95X70	75X50	11	40	160	132	100
PAPE5C0150P2T2P0N	=	150	77X67	61.5/56X51.5/46.5	8.5	40	185	132	100

apparatus castors



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
plain bearing
without threadguards
hardness: shore A 95

swivel castor with bolt hole		mm	mm		mm	mm		Kg
HAH12C0075P2T2P0N	=	075	11		24	100		75
HAH15C0100P2T2P0N	=	100	11		37	135		100
HAH15C0125P2T2P0N	=	125	11		40	160		100
HAH15C0150P2T2P0N	=	150	11		40	185		100

swivel castor with bolt hole with total brake (aluminium pedal)		mm	mm		mm	mm	mm	Kg
BAH12C0075P2T2P0N	=	075	11		37	100	132	75
BAH15C0100P2T2P0N	=	100	11		40	135	132	100
BAH15C0125P2T2P0N	=	125	11		40	160	132	100
BAH15C0150P2T2P0N	=	150	11		40	185	132	100

swivel castor with bolt hole with total brake (plastic pedal)		mm	mm		mm	mm	mm	Kg
KAH15C0100P2T2P0N	=	100	11		37	135	132	100
KAH15C0125P2T2P0N	=	125	11		40	160	132	100
KAH15C0150P2T2P0N	=	150	11		40	185	132	100

wheel only		mm	mm	mm	mm	Ø		Kg
075P2T2P0N	=	075	25	28	8	M6		75
100P2T2P0N	=	100	32	36	12	M8		100
125P2T2P0N	=	125	32	36	12	M8		100
150P2T2P0N	=	150	32	36	12	M8		100

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 95

swivel castor	mm	mm	mm	mm	mm	mm		Kg
SAPA2C0075P2T2B42	075	60X60	48/38X48/38	6.3	24	100		75
SAPE5C0100P2T2B42	100	77X67	61.5/56X51.5/46.5	8.5	37	135		100
SAPE5C0125P2T2B42	125	77X67	61.5/56X51.5/46.5	8.5	40	160		100
SAPJ5C0125P2T2B42	125	95X70	75X50	11	40	160		100
SAPE5C0150P2T2B42	150	77X67	61.5/56X51.5/46.5	8.5	40	185		100

fixed castor	mm	mm	mm	mm		mm		Kg
FAPCCC0075P2T2B42	075	67X60	48/40X48/40	6.3		100		75
FAPE5C0100P2T2B42	100	77X67	61.5/56X51.5/46.5	8.5		135		100
FAPE5C0125P2T2B42	125	77X67	61.5/56X51.5/46.5	8.5		160		100
FAPJ5C0125P2T2B42	125	95X70	75X50	11		160		100
FAPE5C0150P2T2B42	150	77X67	61.5/56X51.5/46.5	8.5		185		100

swivel castor with total brake (aluminium pedal)	mm	mm	mm	mm	mm	mm	mm	Kg
TAPA2C0075P2T2B42	075	60X60	48/38X48/38	6.3	24	100	80	75
TAPE5C0100P2T2B42	100	77X67	61.5/56X51.5/46.5	8.5	37	135	132	100
TAPE5C0125P2T2B42	125	77X67	61.5/56X51.5/46.5	8.5	40	160	132	100
TAPJ5C0125P2T2B42	125	95X70	75X50	11	40	160	132	100
TAPE5C0150P2T2B42	150	77X67	61.5/56X51.5/46.5	8.5	40	185	132	100

swivel castor with total brake (plastic pedal)	mm	mm	mm	mm	mm	mm	mm	Kg
PAPE5C0100P2T2B42	100	77X67	61.5/56X51.5/46.5	8.5	37	135	132	100
PAPE5C0125P2T2B42	125	77X67	61.5/56X51.5/46.5	8.5	40	160	132	100
PAPJ5C0125P2T2B42	125	95X70	75X50	11	40	160	132	100
PAPE5C0150P2T2B42	150	77X67	61.5/56X51.5/46.5	8.5	40	185	132	100

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 85

swivel castor with bolt hole	mm	mm		mm	mm		Kg
HAH12C0075P2T2B42	075	11		24	100		75
HAH15C0100P2T2B42	100	11		37	135		100
HAH15C0125P2T2B42	125	11		40	160		100
HAH15C0150P2T2B42	150	11		40	185		100

swivel castor with total brake (aluminium pedal)	mm	mm		mm	mm	mm	Kg
BAH12C0075P2T2B42	075	11		24	100	80	75
BAH15C0100P2T2B42	100	11		37	135	132	100
BAH15C0125P2T2B42	125	11		40	160	132	100
BAH15C0150P2T2B42	150	11		40	185	132	100

swivel castor with total brake (plastic pedal)	mm	mm		mm	mm	mm	Kg
KAH15C0100P2T2B42	100	11		37	135	132	100
KAH15C0125P2T2B42	125	11		40	160	132	100
KAH15C0150P2T2B42	150	11		40	185	132	100

wheel only	mm	mm	mm	mm	Ø		Kg
075P2T2B42	075	25	28	10	M6		75
100P2T2B42	100	32	36	15	M8		100
125P2T2B42	125	32	36	15	M8		100
150P2T2B42	150	32	36	15	M8		100



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber ,dark grey
plain bearing
without threadguards
hardness:shore A 95

swivel castor with bolt hole	mm	mm	mm	mm	mm		Kg
HAZ12C0075P2T2P0N =	075	11	11x31	24	100		75
HAX15C0100P2T2P0N =	100	11	19-35	37	135		100
HAX15C0125P2T2P0N =	125	11	19-35	40	160		100
HAX15C0150P2T2P0N =	150	11	19-35	40	185		100

swivel castor with total brake (aluminium pedal)	mm	mm	mm	mm	mm	mm	Kg
BAZ12C0075P2T2P0N =	075	11	11x31	24	100	80	75
BAX15C0100P2T2P0N =	100	11	19-35	37	135	132	100
BAX15C0125P2T2P0N =	125	11	19-35	40	160	132	100
BAX5C0150P2T2P0N =	150	11	19-35	40	185	132	100

swivel castor with total brake (plastic pedal)	mm	mm	mm	mm	mm	mm	Kg
KAX15C0100P2T2P0N =	100	11	19-35	37	135	132	100
KAX15C0125P2T2P0N =	125	11	19-35	40	160	132	100
KAX15C0150P2T2P0N =	150	11	19-35	40	185	132	100

wheel only	mm	mm	mm	mm	Ø		Kg
075P2T2P0N =	075	25	28	8	M6		75
100P2T2P0N =	100	32	36	12	M8		100
125P2T2P0N =	125	32	36	12	M8		100
150P2T2P0N =	150	32	36	12	M8		100



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 85

swivel castor with bolt hole	mm	mm	mm	mm	mm		Kg
HAZ12C0075P2T2B42	075	11	11x31	24	100		75
HAX15C0100P2T2B42	100	11	19-35	37	135		100
HAX15C0125P2T2B42	125	11	19-35	40	160		100
HAX15C0150P2T2B42	150	11	19-35	40	185		100

swivel castor with total brake (aluminium pedal)	mm	mm	mm	mm	mm	mm	Kg
BAZ12C0075P2T2B42	075	11	11x31	24	100	80	75
BAX15C0100P2T2B42	100	11	19-35	37	135	132	100
BAX15C0125P2T2B42	125	11	19-35	40	160	132	100
BAX15C0150P2T2B42	150	11	19-35	40	185	132	100

swivel castor with total brake (plastic pedal)	mm	mm	mm	mm	mm	mm	Kg
KAX15C0100P2T2B42	100	11	19-35	37	135	132	100
KAX15C0125P2T2B42	125	11	19-35	40	160	132	100
KAX15C0150P2T2B42	150	11	19-35	40	185	132	100

wheel only	mm	mm	mm	mm	Ø		Kg
075P2T2B42	075	25	28	10	M6		75
100P2T2B42	100	32	36	15	M8		100
125P2T2B42	125	32	36	15	M8		100
150P2T2B42	150	32	36	15	M8		100

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
plain bearing
without threadguards
hardness:shore A 95

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 95

swivel castor		mm	mm	mm	mm	mm	mm		Kg
SDPE6C0050P2T2P0N	=	050	60X60	48/39X48/38	6.3	25	70		70
SDPE6C0050P2T2B42		050	60X60	48/39X48/38	6.3	25	70		70
SDPE1C0075P2T2P0N	=	075	77X67	61.5/56X51.5/46.5	8.5	31.4	102		100
SDPE1C0075P2T2B42		075	77X67	61.5/56X51.5/46.5	8.5	31.4	102		100

fixed castor		mm	mm	mm	mm	mm	mm	mm	Kg
TDPE6C0050P2T2P0N	=	050	60X60	48/39X48/38	6.3	25	70	80	70
TDPE6C0050P2T2B42		050	60X60	48/39X48/38	6.3	25	70	80	70
TDPE1C0075P2T2P0N	=	075	77X67	61.5/56X51.5/46.5	8.5	31.4	102	96	100
TDPE1C0075P2T2B42		075	77X67	61.5/56X51.5/46.5	8.5	31.4	102	96	100

wheel only		mm	mm	mm	mm	Ø		Kg
050P2T2P0N	=	050	19	22	8	M6		50
075P2T2B42	=	075	25	28	8	M6		75

wheel only		mm	mm	mm	mm	Ø		Kg
050P2T2B42		050	19	22	10	M6		50
075P2T2B42		075	25	28	10	M6		75

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P2T2P0N
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
plain bearing
without threadguards
hardness:shore A 95

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic
hardness:shore A 95

swivel castor		mm	mm	mm	mm	mm	mm		Kg
HDHHHC0050P2T2P0N	=	050	60X60	48/39X48/38	6.3	25	70		70
HDHHHC0050P2T2B42		050	60X60	48/39X48/38	6.3	25	70		70
HDHJJC0075P2T2P0N	=	075	77X67	61.5/56X51.5/46.5	8.5	31.4	102		100
HDHJJC0075P2T2B42		075	77X67	61.5/56X51.5/46.5	8.5	31.4	102		100

fixed castor		mm	mm	mm	mm	mm	mm	mm	Kg
BDHHHC0050P2T2P0N	=	050	60X60	48/39X48/38	6.3	25	70	80	70
BDHHHC0050P2T2B42		050	60X60	48/39X48/38	6.3	25	70	80	70
BDHJJC0075P2T2P0N	=	075	77X67	61.5/56X51.5/46.5	8.5	31.4	102	96	100
BDHJJC0075P2T2B42		075	77X67	61.5/56X51.5/46.5	8.5	31.4	102	96	100

wheel only		mm	mm	mm	mm	Ø		Kg
050P2T2P0N	=	050	19	22	8	M6		50
075P2T2B42	=	075	25	28	8	M6		75

wheel only		mm	mm	mm	mm	Ø		Kg
050P2T2B42		050	19	22	10	M6		50
075P2T2B42		075	25	28	10	M6		75

transport castors
CASCOO Premium

Classic type, wide application

Our castors for handling trolleys are widely applicable for lots of different options of transport.
According to the application condition of the equipment,
you can always find the most optimal castor with an excellent resistance,
durability and safety.

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P0P0P0N
wheel:Polypropylene,white
plain bearing
without threadguards

wheel: P0P0R1W
wheel:Polypropylene,white
roller bearing
with small threadguards,metal

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080P0P0P0N SPP21WC080P0P0R1W	080	105X80	80/77x60	9	40	108	80
SPP21WC100P0P0P0N SPP21WC100P0P0R1W	100	105X80	80/77x60	9	40	128	100
SPP31WC125P0P0P0N SPP31WC125P0P0R1W SPP31WC125Q0P0R1W	125	105X80	80/77x60	9	40	155	150
SPP31WC125P0P0B30	125	105X80	80/77x60	9	40	155	200
SPP58WC160P0P0R1W	160	135X110	105x84/76	11	55	195	250
SPP58WC200P0P0R1W	200	135X110	105x84/76	11	55	235	250

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080P0P0P0N FPP22WC080P0P0R1W	080	105X80	80/77x60	9	108	80
FPP22WC100P0P0P0N FPP22WC100P0P0R1W	100	105X80	80/77x60	9	128	100
FPP35WC125P0P0P0N FPP35WC125P0P0R1W FPP35WC125Q0P0R1W	125	105X80	80/77x60	9	155	150
FPP35WC125P0P0B30	125	105X80	80/77x60	9	155	200
FPP53WC160P0P0R1W	160	135X110	105x84/76	11	195	250
FPP53WC200P0P0R1W	200	135X110	105x84/76	11	235	250

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080P0P0P0N TPP21WC080P0P0R1W	080	105X80	80/77x60	9	45	108	127	80
TPP21WC100P0P0P0N TPP21WC100P0P0R1W	100	105X80	80/77x60	9	45	128	127	100
TPP31WC125P0P0P0N TPP31WC125P0P0R1W TPP31WC125Q0P0R1W	125	105X80	80/77x60	9	45	155	127	150
TPP31WC125P0P0B30	125	105X80	80/77x60	9	45	155	127	200
TPP58WC160P0P0R1W	160	135X110	105x84/76	11	55	195	165	250
TPP58WC200P0P0R1W	200	135X110	105x84/76	11	55	235	165	250

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P0P0P0N
wheel:Polypropylene,white
plain bearing
without threadguards

wheel: P0P0R1W
wheel:Polypropylene,white
roller bearing
with small threadguards,metal

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080P0P0P0N HPH35WC080P0P0R1W	080	13	40	107	70
HPH35WC100P0P0P0N HPH35WC100P0P0R1W	100	13	40	127	90
HPH85WC125P0P0P0N HPH85WC125P0P0R1W HPH85WC125Q0P0R1W HPH85WC125P0P0B30	125	13	40	154	140
HPH98WC160P0P0R1W	160	13	55	194	200
HPH98WC200P0P0R1W	200	13	55	234	200

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080P0P0P0N BPH35WC080P0P0R1W	080	13	45	107	127	70
BPH35WC100P0P0P0N BPH35WC100P0P0R1W	100	13	45	127	127	90
BPH85WC125P0P0P0N BPH85WC125P0P0R1W BPH85WC125Q0P0R1W BPH85WC125P0P0B30	125	13	45	154	127	140
BPH98WC160P0P0R1W	160	13	55	194	165	200
BPH98WC200P0P0R1W	200	13	55	234	165	200

wheel only	mm	mm	mm	mm	ø	Kg
080P0P0P0N 080P0P0R1W	080	34	40	12	M8	80
100P0P0P0N 100P0P0R1W	100	36	40	12	M8	100
125P0P0P0N 125P0P0R1W 125Q0P0R1W 125P0P0B30	125	38	50	15	M10	150
160P0P0R1W	160	40	59	20	M12	250
200P0P0R1W	200	50	59	20	M12	250

transport castors - special 108mm
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P0P0R1Y
wheel:Polypropylene,white
roller bearing
with small threadguards,metal

wheel: Q0P0R1Y
wheel:Polypropylene with steel tube,white
roller bearing
with small threadguards,metal

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21YC108P0P0R1Y	108	105X80	80/77x60	9	40	132	120
SPP21YC108Q0P0R1Y	108	105X80	80/77x60	9	40	132	150

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22YC108P0P0R1Y	108	105X80	80/77x60	9	132	120

fixed castor strengthened	mm	mm	mm	mm	mm	Kg
FPP65YC108Q0P0R1Y	108	105X80	80/77x60	9	132	150

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21YC108P0P0R1Y	108	105X80	80/77x60	9	45	132	127	120
TPP21YC108Q0P0R1Y	108	105X80	80/77x60	9	45	132	127	150

transport castors - special 108mm
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P0P0R1Y
wheel:Polypropylene,white
roller bearing
with small threadguards,metal

wheel: Q0P0R1Y
wheel:Polypropylene with steel tube,white
roller bearing
with small threadguards,metal

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35YC108P0P0R1Y	108	13	40	131	100
HPH35YC108Q0P0R1Y					

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35YC108P0P0R1Y	108	13	45	131	127	100
BPH35YC108Q0P0R1Y						

Wheel only	mm	mm	mm	mm	Ø	Kg
108P0P0R1Y	108	36	40	12	M8	120
108Q0P0R1Y	108	36	40	12	M8	150

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: N0N0P0N
wheel:Polyamide,white
plain bearing
without threadguards

wheel: N0N0R1W
wheel:Polyamide,white
roller bearing
with small threadguards,metal

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080N0N0P0N SPP21WC080N0N0R1W	080	105X80	80/77x60	9	40	108	130
SPP21WC100N0N0P0N SPP21WC100N0N0R1W	100	105X80	80/77x60	9	40	128	150
SPP31WC125N0N0P0N SPP31WC125N0N0R1W SPP31WC125H0N0R1W SPP31WC125N0N0B30	125	105X80	80/77x60	9	40	155	200
SPP58WC160N0N0R1W	160	135X110	105x84/76	11	55	195	300
SPP58WC200N0N0R1W	200	135X110	105x84/76	11	55	235	300

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080N0N0P0N FPP22WC080N0N0R1W	080	105X80	80/77x60	9	108	130
FPP22WC100N0N0P0N FPP22WC100N0N0R1W	100	105X80	80/77x60	9	128	150
FPP35WC125N0N0P0N FPP35WC125N0N0R1W FPP35WC125H0N0R1W FPP35WC125N0N0B30	125	105X80	80/77x60	9	155	200
FPP53WC160N0N0R1W	160	135X110	105x84/76	11	195	300
FPP53WC200N0N0R1W	200	135X110	105x84/76	11	235	300

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080N0N0P0N TPP21WC080N0N0R1W	080	105X80	80/77x60	9	45	108	127	130
TPP21WC100N0N0P0N TPP21WC100N0N0R1W	100	105X80	80/77x60	9	45	128	127	150
TPP31WC125N0N0P0N TPP31WC125N0N0R1W TPP31WC125H0N0R1W TPP31WC125N0N0B30	125	105X80	80/77x60	9	45	155	127	200
TPP58WC160N0N0R1W	160	135X110	105x84/76	11	55	195	165	300
TPP58WC200N0N0R1W	200	135X110	105x84/76	11	55	235	165	300

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



Wheel:N0N0P0N
wheel:Polyamide,white
plain bearing
without threadguards

wheel: N0N0R1W
wheel:Polyamide,white
roller bearing
with small threadguards,metal

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080N0N0P0N HPH35WC080N0N0R1W	080	13	40	107	130
HPH35WC100N0N0P0N HPH35WC100N0N0R1W	100	13	40	127	150
HPH85WC125N0N0P0N HPH85WC125N0N0R1W HPH85WC125H0N0R1W HPH85WC125N0N0B30	125	13	40	154	150
HPH98WC160N0N0R1W	160	13	55	194	200
HPH98WC200N0N0R1W	200	13	55	234	200

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080N0N0P0N BPH35WC080N0N0R1W	080	13	45	107	127	130
BPH35WC100N0N0P0N BPH35WC100N0N0R1W	100	13	45	127	127	150
BPH85WC125N0N0P0N BPH85WC125N0N0R1W BPH85WC125H0N0R1W BPH85WC125N0N0B30	125	13	45	154	127	150
BPH98WC160N0N0R1W	160	13	55	194	165	200
BPH98WC200N0N0R1W	200	13	55	234	165	200

wheel only	mm	mm	mm	mm	ø	Kg
080N0N0P0N 080N0N0R1W	080	34	40	12	M8	130
100N0N0P0N 100N0N0R1W	100	36	40	12	M8	150
125N0N0P0N 125N0N0R1W 125H0N0R1W 125N0N0B30	125	38	50	15	M10	200
160N0N0R1W	160	40	59	20	M12	300
200N0N0R1W	200	50	59	20	M12	300

transport castors - special 108mm
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: H0N0R1Y
wheel:Polyamide with steel tube,white
roller bearing
with small threadguards,metal

wheel: N0N0B30
wheel:Polyamide,white
single ball bearing
with small threadguards,plastic

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21YC108H0N0R1Y SPP21YC108N0N0B30	108	105X80	80/77x60	9	40	132	200

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22YC108H0N0R1Y FPP22YC108H0N0B30	108	105X80	80/77x60	9	132	150

fixed castor strengthened	mm	mm	mm	mm	mm	Kg
FPP65YC108H0N0R1Y	108	105X80	80/77x60	9	132	200
FPP65YC108N0N0B30	108	105X80	80/77x60	9	132	200
FPP63YC108H0N0R1Y	108	105X80	80/77x60	9	132	200
FPP63YC108N0N0B30	108	105X80	80/77x60	9	132	200

fixed castor	mm	mm	mm	mm	mm	mm	Kg
FPP74YC108H0N0R1Y	108	100X90	78x60	9	36	132	200

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21YC108H0N0R1Y	108	105X80	80/77x60	9	45	132	127	200
TPP21YC108N0N0B30	108	105X80	80/77x60	9	45	132	127	200

transport castors - special 108mm
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: H0N0R1Y
wheel:Polyamide with steel tube,white
roller bearing
with small threadguards,metal

wheel: N0N0B30
wheel:Polyamide,white
single ball bearing
with small threadguards,plastic

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35YC108N0N0R1Y HPH35YC108N0N0B30	108	13	40	131	150

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35YC108N0N0R1Y BPH35YC108N0N0B30	108	13	45	131	127	150

wheel only	mm	mm	mm	mm	Ø	Kg
108H0N0R1Y 108N0N0B30	108	36	40	12	M8	200

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: Q0P0R1W
wheel:Polypropylene with steel tube,white
roller bearing
with small threadguards,metal

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP47WC125Q0P0R1W	125	135X110	105x84/76	11	40	155	200

fixed castor	mm	mm	mm	mm	mm	Kg
FPP43WC125Q0P0R1W	125	135X110	105x84/76	11	155	200

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP47WC125Q0P0R1W	125	135X110	105x84/76	11	50	155	154	200

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: H0N0R1W
wheel:Polyamide with steel tube, white
roller bearing
with small threadguards,metal

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP47WC125H0N0R1W	125	135X110	105x84/76	11	40	155	250

fixed castor	mm	mm	mm	mm	mm	Kg
FPP43WC125H0N0R1W	125	135X110	105x84/76	11	155	250

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP47WC125H0N0R1W	125	135X110	105x84/76	11	50	155	154	250

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: T6P2R1W and T6P2B32
wheel centre:Polypropylene with TPR center,grey + red,noise reduced
tread:Polypropylene,grey
roller bearing,with threadguards, metal
ball bearing,with small threadguards,plastic

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC100T6P2R1W SPP21WC100T6P2B32	100	105X80	80/77x60	9	40	128	160
SPP31WC125T6P2R1W SPP31WC125T6P2B32	125	105X80	80/77x60	9	40	155	200

fixed castor	mm	mm	mm	mm	mm	Kg
FPP25WC100T6P2R1W FPP25WC100T6P2B32	100	105X80	80/77x60	9	128	160
FPP35WC125T6P2R1W FPP35WC125T6P2B32	125	105X80	80/77x60	9	155	200

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC100T6P2R1W TPP21WC100T6P2B32	100	105X80	80/77x60	9	45	128	127	160
TPP31WC125T6P2R1W TPP31WC125T6P2B32	125	105X80	80/77x60	9	45	155	127	200

wheel only	mm	mm	mm	mm	Ø	Kg
100T6P2R1W 100T6P2B32	100	36	40	12	M8	160
125T6P2R1W 125T6P2B32	125	36	50	15	M10	200



transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
Standard:wheel axle with nut

wheel: M6N2R32 and M6N2B32
wheel centre:Polyamide with rubber centre,grey + red,noise reduced
tread:Polyamide,grey
roller bearing
ball bearing
with threadguards,plastic

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC100M6N2R32 SPP21WC100M6N2B32	100	105X80	80/77x60	9	40	128	160
SPP31WC125M6N2R32 SPP31WC125M6N2B32	125	105X80	80/77x60	9	40	155	200

fixed castor	mm	mm	mm	mm	mm	Kg
FPP25WC100M6N2R32 FPP25WC100M6N2B32	100	105X80	80/77x60	9	128	160
FPP35WC125M6N2R32 FPP35WC125M6N2B32	125	105X80	80/77x60	9	155	200

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC100M6N2R32 TPP21WC100M6N2B32	100	105X80	80/77x60	9	45	128	127	160
TPP31WC125M6N2R32 TPP31WC125M6N2B32	125	105X80	80/77x60	9	45	155	127	200

wheel only	mm	mm	mm	mm	Ø	Kg
100M6N2R32 100M6N2B32	100	36	40	12	M8	160
125M6N2R32 125M6N2B32	125	36	50	15	M10	200



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
Standard:wheel axle with nut

wheel: N2U6R1W and N2U6B32
wheel centre:Polyamide,grey
tread:Polyurethane,red
N2U6R1W:roller bearing, with small threadguards,metal
N2U6B32:single ball bearing,with small threadguards,plastic
hardness:shore A 92

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC100N2U6R1W SPP21WC100N2U6B32	100	105x80	80/77x60	9	40	128	150
SPP31WC125N2U6R1W SPP31WC125N2U6B32	125	105x80	80/77x60	9	40	155	200

fixed castor	mm	mm	mm	mm	mm	Kg
FPP25WC100N2U6R1W FPP25WC100N2U6B32	100	105x80	80/77x60	9	128	150
FPP35WC125N2U6R1W FPP35WC125N2U6B32	125	105x80	80/77x60	9	155	200

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC100N2U6R1W TPP21WC100N2U6B32	100	105x85	80/77x60	9	45	128	127	150
TPP31WC125N2U6R1W TPP31WC125N2U6B32	125	105x85	80/77x60	9	45	155	127	200

wheel only	mm	mm	mm	mm	Ø	Kg
100N2U6R1W 100N2U6B32	100 100	32 32	40 40	12 15	M8 M8	150 150
125N2U6R1W 125N2U6B32	125	32	50	15	M10	200

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: N2U6R1W and N2U6D32
wheel centre:Polyamide,grey
tread:Polyurethane,red
N2U6R1W:roller bearing, with small threadguards,metal
N2U6D32:double ball bearing,with small threadguards,plastic
hardness:shore A 92

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP58WC160N2U6R1W SPP58WC160N2U6D32	160	135x110	105x84/76	11	55	195	300
SPP58WC200N2U6R1W SPP58WC200N2U6D32	200	135x110	105x84/76	11	55	235	350

fixed castor	mm	mm	mm	mm	mm	Kg
FPP53WC160N2U6R1W FPP53WC160N2U6D32	160	135x110	105x84/76	11	195	300
FPP53WC200N2U6R1W FPP53WC200N2U6D32	200	135x110	105x84/76	11	235	350

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP58WC160N2U6R1W TPP58WC160N2U6D32	160	135x110	105x84/76	11	55	195	165	300
TPP58WC200N2U6R1W TPP58WC200N2U6D32	200	135x110	105x84/76	11	55	235	165	350

wheel only	mm	mm	mm	mm	Ø	Kg
160N2U6R1W 160N2U6D32	160	40	59	20	M12	300
200N2U6R1W 200N2U6D32	200	50	59	20	M12	350

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2V2R1W
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber(TPR),dark grey
roller bearing
with small threadguards,metal
hardness:shore A 85

wheel: P2V2B32
wheel centre:Polypropylene ,light grey
tread:thermoplastic rubber(TPR),dark grey
single ball bearing
with small threadguards,plastic
hardness:shore A 85

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC100P2V2R1W SPP21WC100P2V2B32	100	105X80	80/77x60	9	40	128	100
SPP31WC125P2V2R1W SPP31WC125P2V2B32	125	105X80	80/77x60	9	40	155	135

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC100P2V2R1W FPP22WC100P2V2B32	100	105X80	80/77x60	9	128	100
FPP32WC125P2V2R1W FPP32WC125P2V2B32	125	105X80	80/77x60	9	155	135

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC100P2V2R1W TPP21WC100P2V2B32	100	105X80	80/77x60	9	45	128	127	100
TPP31WC125P2V2R1W TPP31WC125P2V2B32	125	105X80	80/77x60	9	45	155	127	135

wheel only	mm	mm	mm	mm	Ø	Kg
100P2V2R1W 100P2V2B32	100 100	32 32	40 40	12 15	M8 M8	100 100
125P2V2R1W 125P2V2B32	125	32	50	15	M10	135

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2V2R1W
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber(TPR),dark grey
roller bearing
with small threadguards,metal
hardness:shore A 85

wheel: P2V2D32
wheel centre:Polypropylene ,light grey
tread:thermoplastic rubber(TPR),dark grey
double ball bearing
with small threadguards,plastic
hardness:shore A 85

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP58WC160P2V2R1W SPP58WC160P2V2D32	160	135x110	105x84/76	11	55	195	200
SPP58WC200P2V2R1W SPP58WC200P2V2D32	200	135x110	105x84/76	11	55	235	200

fixed castor	mm	mm	mm	mm	mm	Kg
FPP55WC160P2V2R1W FPP55WC160P2V2D32	160	135x110	105x84/76	11	195	200
FPP55WC200P2V2R1W FPP55WC200P2V2D32	200	135x110	105x84/76	11	235	200

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP58WC160P2V2R1W TPP58WC160P2V2D32	160	135x110	105x84/76	11	55	195	165	200
TPP58WC200P2V2R1W TPP58WC200P2V2D32	200	135x110	105x84/76	11	55	235	165	200

wheel only	mm	mm	mm	mm	Ø	Kg
160P2V2R1W 160P2V2D32	160	40	59	20	M12	200
200P2V2R1W 200P2V2D32	200	50	59	20	M12	200

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: R4E1R0N
wheel centre:Polyamide,black
tread:Elastic rubber,blue
hardness of tread: shore A 65
roller bearing
without threadguards

wheel: R4E1B34
wheel centre: Polyamide,black
tread:Elastic rubber,blue
hardness of tread: shore A 65
ball bearing
with small threadguards, plastic

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080R4E1R0N SPP21WC080R4E1B34	080	105X80	80/77x60	9	40	108	130
SPP21WC100R4E1R0N SPP21WC100R4E1B34	100	105X80	80/77x60	9	40	128	160
SPP31WC125R4E1R0N SPP31WC125R4E1B34	125	105X80	80/77x60	9	40	155	200
SPP58WC160R4E1R0N SPP58WC160R4E1D0N	160	135X110	105X84/76	11	55	195	300
SPP58WC200R4E1R0N SPP58WC200R4E1D0N	200	135X110	105X84/76	11	55	235	350

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080R4E1R0N FPP22WC080R4E1B34	080	105X80	80/77x60	9	108	130
FPP22WC100R4E1R0N FPP22WC100R4E1B34	100	105X80	80/77x60	9	128	160
FPP35WC125R4E1R0N FPP35WC125R4E1B34	125	105X80	80/77x60	9	155	200
FPP53WC160R4E1R0N FPP53WC160R4E1D0N	160	135X110	105X84/76	11	195	300
FPP53WC200R4E1R0N FPP53WC200R4E1D0N	200	135X110	105X84/76	11	235	350

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080R4E1R0N TPP21WC080R4E1B34	080	105X80	80/77x60	9	45	108	127	130
TPP21WC100R4E1R0N TPP21WC100R4E1B34	100	105X80	80/77x60	9	45	128	127	160
TPP31WC125R4E1R0N TPP31WC125R4E1B34	125	105X80	80/77x60	9	45	155	127	200
TPP58WC160R4E1R0N TPP58WC160R4E1D0N	160	135X110	105X84/76	11	55	195	165	300
TPP58WC200R4E1R0N TPP58WC200R4E1D0N	200	135X110	105X84/76	11	55	235	165	350

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: R4E1R0N
wheel centre:Polyamide,black
tread:Elastic rubber,blue
hardness of tread: shore A 65
roller bearing
without threadguards

wheel: R4E1B34
wheel centre: Polyamide, black
tread:Elastic rubber,blue
hardness of tread: shore A 65
ball bearing
with small threadguards,plastic

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080R4E1R0N HPH35WC080R4E1B34	080	13	40	107	130
HPH35WC100R4E1R0N HPH35WC100R4E1B34	100	13	40	127	150
HPH85WC125R4E1R0N HPH85WC125R4E1B34	125	13	40	154	150
HPH98WC160R4E1R0N HPH98WC160R4E1D0N	160	13	55	194	200
HPH98WC200R4E1R0N HPH98WC200R4E1D0N	200	13	55	234	250

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080R4E1R0N BPH35WC080R4E1B34	080	13	45	107	127	130
BPH35WC100R4E1R0N BPH35WC100R4E1B34	100	13	45	127	127	150
BPH85WC125R4E1R0N BPH85WC125R4E1B34	125	13	45	154	127	150
BPH98WC160R4E1R0N BPH98WC160R4E1D0N	160	13	55	194	165	200
BPH98WC200R4E1R0N BPH98WC200R4E1D0N	200	13	55	234	165	250

(160-200mm)

wheel only	mm	mm	mm	mm	Ø	Kg
080R4E1R0N 080R4E1B34	080	35	40	12	M8	130
100R4E1R0N 100R4E1B34	100 100	35 35	40 40	12 15	M8 M8	160
125R4E1R0N 125R4E1B34	125	38	50	15	M10	200
160R4E1R0N 160R4E1D0N	160	46	59	20	M12	300
200R4E1R0N 200R4E1D0N	200	46	59	20	M12	350



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P4R4R0N
wheel centre:Polypropylene,black
tread:solid rubber,black
without threadguards
roller bearing

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080P4R4R0N	080	105X80	80/77x60	9	40	108	70
SPP21WC100P4R4R0N	100	105X80	80/77x60	9	40	128	75
SPP31WC125P4R4R0N	125	105X80	80/77x60	9	40	155	100
SPP58WC160P4R4R0N	160	135X110	105X84/76	11	55	195	135
SPP58WC200P4R4R0N	200	135X110	105X84/76	11	55	235	205

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080P4R4R0N	080	105X80	80/77x60	9	108	70
FPP22WC100P4R4R0N	100	105X80	80/77x60	9	128	75
FPP32WC125P4R4R0N	125	105X80	80/77x60	9	155	100
FPP55WC160P4R4R0N	160	135X110	105X84/76	11	195	135
FPP55WC200P4R4R0N	200	135X110	105X84/76	11	235	205

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080P4R4R0N	080	105X80	80/77x60	9	45	108	127	70
TPP21WC100P4R4R0N	100	105X80	80/77x60	9	45	128	127	75
TPP31WC125P4R4R0N	125	105X80	80/77x60	9	45	155	127	100
TPP58WC160P4R4R0N	160	135X110	105X84/76	11	55	195	165	135
TPP58WC200P4R4R0N	200	135X110	105X84/76	11	55	235	165	205

transport castors
CASCOO Premium



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P4R4R0N
wheel centre:Polypropylene,black
tread:solid rubber,black
without threadguards
roller bearing

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080P4R4R0N	080	13	40	107	70
HPH35WC100P4R4R0N	100	13	40	127	75
HPH85WC125P4R4R0N	125	13	40	154	100
HPH98WC160P4R4R0N	160	13	55	194	135
HPH98WC200P4R4R0N	200	13	55	234	205

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080P4R4R0N	080	13	45	107	127	70
BPH35WC100P4R4R0N	100	13	45	127	127	75
BPH85WC125P4R4R0N	125	13	45	154	127	100
BPH98WC160P4R4R0N	160	13	55	194	165	135
BPH98WC200P4R4R0N	200	13	55	234	165	205

wheel only	mm	mm	mm	mm	Ø	Kg
080P4R4R0N	080	35	40	12	M8	70
100P4R4R0N	100	35	40	12	M8	75
125P4R4R0N	125	38	50	12	M10	100
160P4R4R0N	160	40	59	20	M12	135
200P4R4R0N	200	50	59	20	M12	205

transport castors
CASCOO Premium



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P4R2R0N
wheel centre:Polypropylene,black
tread:solid rubber,grey
without threadguards
roller bearing

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080P4R2R0N	080	105X80	80/77x60	9	40	108	70
SPP21WC100P4R2R0N	100	105X80	80/77x60	9	40	128	75
SPP31WC125P4R2R0N	125	105X80	80/77x60	9	40	155	100
SPP58WC160P4R2R0N	160	135X110	105X84/76	11	55	195	135
SPP58WC200P4R2R0N	200	135X110	105X84/76	11	55	235	205

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080P4R2R0N	080	105X80	80/77x60	9	108	70
FPP22WC100P4R2R0N	100	105X80	80/77x60	9	128	75
FPP32WC125P4R2R0N	125	105X80	80/77x60	9	155	100
FPP55WC160P4R2R0N	160	135X110	105x84/76	11	195	135
FPP55WC200P4R2R0N	200	135X110	105x84/76	11	235	205

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080P4R2R0N	080	105X80	80/77x60	9	45	108	127	70
TPP21WC100P4R2R0N	100	105X80	80/77x60	9	45	128	127	75
TPP31WC125P4R2R0N	125	105X80	80/77x60	9	45	155	127	100
TPP58WC160P4R2R0N	160	135X110	105x84/76	11	55	195	165	135
TPP58WC200P4R2R0N	200	135X110	105x84/76	11	55	235	165	205

transport castors
CASCOO Premium



Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P4R2R0N
wheel centre:Polypropylene,black
tread:solid rubber,grey
without threadguards
roller bearing

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080P4R2R0N	080	13	40	107	70
HPH35WC100P4R2R0N	100	13	40	127	75
HPH85WC125P4R2R0N	125	13	40	154	100
HPH98WC160P4R2R0N	160	13	55	194	135
HPH98WC200P4R2R0N	200	13	55	234	205

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080P4R2R0N	080	13	45	107	127	70
BPH35WC100P4R2R0N	100	13	45	127	127	75
BPH85WC125P4R2R0N	125	13	45	154	127	100
BPH98WC160P4R2R0N	160	13	55	194	165	135
BPH98WC200P4R2R0N	200	13	55	234	165	205

wheel only	mm	mm	mm	mm	Ø	Kg
080P4R2R0N	080	35	40	12	M8	70
100P4R2R0N	100	35	40	12	M8	75
125P4R2R0N	125	38	50	12	M10	100
160P4R2R0N	160	40	59	20	M12	135
200P4R2R0N	200	50	59	20	M12	205

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: SWR4R0N
wheel centre:Steel
tread:solid rubber,black
without threadguards
roller bearing

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080SWR4R0N	080	105X80	80/77x60	9	40	108	70
SPP21WC100SWR4R0N	100	105X80	80/77x60	9	40	128	75
SPP31WC125SWR4R0N	125	105X80	80/77x60	9	40	155	100
SPP58WC160SWR4R0N	160	135X110	105X84/76	11	55	195	135
SPP58WC200SWR4R0N	200	135X110	105X84/76	11	55	235	205

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080SWR4R0N	080	105X80	80/77x60	9	108	70
FPP22WC100SWR4R0N	100	105X80	80/77x60	9	128	75
FPP32WC125SWR4R0N	125	105X80	80/77x60	9	155	100
FPP55WC160SWR4R0N	160	135X110	105x84/76	11	195	135
FPP55WC200SWR4R0N	200	135X110	105x84/76	11	235	205

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080SWR4R0N	080	105X80	80/77x60	9	45	108	127	70
TPP21WC100SWR4R0N	100	105X80	80/77x60	9	45	128	127	75
TPP31WC125SWR4R0N	125	105X80	80/77x60	9	45	155	127	100
TPP58WC160SWR4R0N	160	135X110	105x84/76	11	55	195	165	135
TPP58WC200SWR4R0N	200	135X110	105x84/76	11	55	235	165	205

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: SWR4R0N
wheel centre:Steel
tread:solid rubber,black
without threadguardsl
roller bearing

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080SWR4R0N	080	13	40	107	70
HPH35WC100SWR4R0N	100	13	40	127	75
HPH85WC125SWR4R0N	125	13	40	154	100
HPH98WC160SWR4R0N	160	13	55	194	135
HPH98WC200SWR4R0N	200	13	55	234	205

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080SWR4R0N	080	13	45	107	127	70
BPH35WC100SWR4R0N	100	13	45	127	127	75
BPH85WC125SWR4R0N	125	13	45	154	127	100
BPH98WC160SWR4R0N	160	13	55	194	165	135
BPH98WC200SWR4R0N	200	13	55	234	165	205

wheel only	mm	mm	mm	mm	Ø	Kg
080SWR4R0N	080	27	40	12	M 8	70
100SWR4R0N	100	27	40	12	M 8	75
125SWR4R0N	125	38	40	12	M10	100
160SWR4R0N	160	40	50	20	M12	135
200SWR4R0N	200	50	50	20	M12	205

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: SWR2R0N
wheel centre:Steel
tread:solid rubber,grey
without threadguards
roller bearing

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP21WC080SWR2R0N	080	105X80	80/77x60	9	40	105	70
SPP21WC100SWR2R0N	100	105X80	80/77x60	9	40	128	75
SPP31WC125SWR2R0N	125	105X80	80/77x60	9	40	155	100
SPP58WC160SWR2R0N	160	135X110	105x84/76	11	55	195	135
SPP58WC200SWR2R0N	200	135X110	105x84/76	11	55	235	205

fixed castor	mm	mm	mm	mm	mm	Kg
FPP22WC080SWR2R0N	080	105X80	80/77x60	9	108	70
FPP22WC100SWR2R0N	100	105X80	80/77x60	9	128	75
FPP32WC125SWR2R0N	125	105X80	80/77x60	9	155	100
FPP55WC160SWR2R0N	160	135X110	105x84/76	11	195	135
FPP55WC200SWR2R0N	200	135X110	105x84/76	11	235	205

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP21WC080SWR2R0N	080	105X80	80/77x60	9	45	108	127	70
TPP21WC100SWR2R0N	100	105X80	80/77x60	9	45	128	127	75
TPP31WC125SWR2R0N	125	105X80	80/77x60	9	45	155	127	100
TPP58WC160SWR2R0N	160	135X110	105x84/76	11	55	195	165	135
TPP58WC200SWR2R0N	200	135X110	105x84/76	11	55	235	165	205

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: SWR2R0N
wheel centre:Steel
tread:solid rubber,grey
without threadguards
roller bearing

swivel castor with bolt hole	mm	mm	mm	mm	Kg
HPH35WC080SWR2R0N	080	13	40	107	70
HPH35WC100SWR2R0N	100	13	40	127	75
HPH85WC125SWR2R0N	125	13	40	154	100
HPH98WC160SWR2R0N	160	13	55	194	135
HPH98CC200SWR2R0N	200	13	55	234	205

swivel castor with bolt hole total brake	mm	mm	mm	mm	mm	Kg
BPH35WC080SWR2R0N	080	13	45	107	127	70
BPH35WC100SWR2R0N	100	13	45	127	127	75
BPH85WC125SWR2R0N	125	13	45	154	127	100
BPH98WC160SWR2R0N	160	13	55	194	165	135
BPH98WC200SWR2R0N	200	13	55	234	165	205

wheel only	mm	mm	mm	mm	Ø	Kg
080SWR2R0N	080	27	40	12	M8	70
100SWR2R0N	100	27	40	12	M8	75
125SWR2R0N	125	38	40	12	M10	100
160SWR2R0N	160	40	50	20	M12	135
200SWR2R0N	200	50	50	20	M12	205

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: AAE2D0N
wheel centre:Aluminium,silver
tread:Elastic-tyre,grey
doulbe precision ball bearing
without threadguards

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP37WC100AAE2D0N	100	105X80	80/77x60	9	40	128	200
SPP47WC100AAE2D0N	100	135X110	105x84/76	11	40	128	200
SPP37WC125AAE2D0N	125	105X80	80/77x60	9	40	155	250
SPP47WC125AAE2D0N	125	135X110	105X84/76	11	40	155	250

fixed castor	mm	mm	mm	mm	mm	Kg
FPP33WC100AAE2D0N	100	105X80	80/77x60	9	128	200
FPP43WC100AAE2D0N	100	135X110	105x84/76	11	128	200
FPP33WC125AAE2D0N	125	105X80	80/77x60	9	155	250
FPP43WC125AAE2D0N	125	135X110	105x84/76	11	155	250

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP37WC100AAE2D0N	100	105X80	80/77x60	9	45	128	127	200
TPP47WC100AAE2D0N	100	135X110	105x84/76	11	45	128	127	200
TPP37WC125AAE2D0N	125	105X80	80/77x60	9	45	155	127	250
TPP47WC125AAE2D0N	125	135X110	105x84/76	11	45	155	127	250

wheel only	mm	mm	mm	mm	Ø	Kg
100AAE2D0N	100	40	40	12	M8	200
125AAE2D0N	125	40	50	15	M10	250

transport castors
CASCOO Premium

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: AAU5D0N
wheel centre:Aluminium,silver
tread:Polyurethane,brown
double precision ball bearing
without threadguards

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SPP37WC100AAU5D0N	100	105X80	80/77x60	9	40	128	250
SPP47WC100AAU5D0N	100	135X110	105x84/76	11	40	128	250
SPP37WC125AAU5D0N	125	105X80	80/77x60	9	40	155	300
SPP47WC125AAU5D0N	125	135X110	105x84/76	11	40	155	300

fixed castor	mm	mm	mm	mm	mm	Kg
FPP33WC100AAU5D0N	100	105X80	80/77x60	9	128	250
FPP43WC100AAU5D0N	100	135X110	105x84/76	11	128	250
FPP33WC125AAU5D0N	125	105X80	80/77x60	9	155	300
FPP43WC125AAU5D0N	125	135X110	105x84/76	11	155	300

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
TPP37WC100AAU5D0N	100	105X80	80/77x60	9	45	128	127	250
TPP47WC100AAU5D0N	100	135X110	105x84/76	11	45	128	127	250
TPP37WC125AAU5D0N	125	105X80	80/77x60	9	45	155	127	300
TPP47WC125AAU5D0N	125	135X110	105x84/76	11	45	155	127	300

wheel only	mm	mm	mm	mm	Ø	Kg
100AAU5D0N	100	40	40	12	M8	250
125AAU5D0N	125	40	50	15	M10	300

castors for shopping trolleys

Shopping comes easy with CASCOO

Our castors move around the malls, supermarkets and shopping centers.
With castors, we love and enjoy shopping.
For a better comfort and speed up shopping in the supermarket,
CASCOO is under-developing and increasing high-level castors merely for shopping.

castors for shopping trolleys



Housing made of pressed steel,
zinc plated,ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,
dark grey
single ball bearing
with big threadguards,plastic

swivel castor	mm	mm	mm	mm	Kg
HEHF5CC075P2T2B42	075	10.3	30	100	75
HEHG5CC100P2T2B42	100	11	36	129	100
HEHD5CC125P2T2B42	125	13	38	155	100

Fittings:



Item No.HEHE5CC100
Item No.HEHA5CC125
Hole fitting/apparatus



Item No.HEHF5CC100
Item No.HEHB5CC125
Hole fitting/rivet



Item No.HEHG5CC100
Item No.HEHD5CC125
Hole fitting/hexagonal

wheel only	mm	mm	mm	mm	Ø	Kg
075P2T2B42	75	25	28	10	M6	75
100P2T2B42	100	32	36	15	M8	100
125P2T2B42	125	32	36	15	M8	100

castors for shopping trolleys

Housing made of pressed steel,
zinc plated,
precision bearing
with resistance impact,non-noise,
swivel head,
standard:wheel axle with nut M12x30mm
with plastic protection part

wheel: P2T2B42
wheel centre:Polypropylene,light grey
tread:thermoplastic rubber,dark grey
single ball bearing
with big threadguards,plastic

swivel castor	mm	mm	mm	mm	Kg
HEB25CC125P2T2B42	125	12	38	155	100

wheel only	mm	mm	mm	mm	Ø	Kg
075P2T2B42	75	25	28	10	M6	75
100P2T2B42	100	32	36	15	M8	100
125P2T2B42	125	32	36	15	M8	100



Housing made of pressed steel,
zinc plated,ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: U2U2B32
wheel:Polyurethane, grey
single ball bearing
with threadguards,plastic

swivel castor	mm	mm	mm	mm	Kg
HEC25CC125U2U2B32	125	12	38	155	80

heavy duty castors

heavy duty castors(400-600kg)

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: BAU5D0N
wheel centre:Aluminium,silver
tread:Polyurethan,brown
doulbe precision ball bearing
without threadguards

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SHP5EWC125BAU5D0N	125	135X110	105x84/76	11	40	164	400
SHP5EWC160BAU5D0N	160	135X110	105x84/76	11	55	195	500
SHP5EWC200BAU5D0N	200	135X110	105x84/76	11	55	245	600

fixed castor	mm	mm	mm	mm	mm	Kg
FHP54WC125BAU5D0N	125	135X110	105x84/76	11	164	400
FHP54WC160BAU5D0N	160	135X110	105x84/76	11	195	500
FHP54WC200BAU5D0N	200	135X110	105x84/76	11	245	600

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
THP5EWC125BAU5D0N	125	135X110	105x84/76	11	45	164	154	400
THP5EWC160BAU5D0N	160	135X110	105x84/76	11	55	195	165	500
THP5EWC200BAU5D0N	200	135X110	105x84/76	11	55	245	165	600

wheel only	mm	mm	mm	mm	Ø	Kg
125BAU5D0N	125	50	60	15	M12	400
160BAU5D0N	160	50	60	20	M12	500
200BAU5D0N	200	50	60	20	M12	600

heavy duty castors(250-400kg)

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: BAE4D0N
wheel centre:Aluminium,silver
tread:Elastic rubber,black
double precision ball bearing

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SHP57WC125BAE4D0N	125	135X110	105x84/76	11	40	164	250
SHP57WC160BAE4D0N	160	135X110	105x84/76	11	55	195	300
SHP57WC200BAE4D0N	200	135X110	105x84/76	11	55	245	400

fixed castor	mm	mm	mm	mm	mm	Kg
FHP53WC125BAE4D0N	125	135X110	105x84/76	11	164	250
FHP53WC160BAE4D0N	160	135X110	105x84/76	11	195	300
FHP53WC200BAE4D0N	200	135X110	105x84/76	11	245	400

swivel castor with total brake	mm	mm	mm	mm	mm	mm	mm	Kg
THP57WC125BAE4D0N	125	135X110	105x84/76	11	45	164	154	250
THP57WC160BAE4D0N	160	135X110	105x84/76	11	55	195	165	300
THP57WC200BAE4D0N	200	135X110	105x84/76	11	55	245	165	400

wheel only	mm	mm	mm	mm	Ø	Kg
125BAE4D0N	125	40	50	15	M12	250
160BAE4D0N	160	40	60	15	M12	300
200BAE4D0N	200	50	60	20	M12	400

castors for
➤ waste bins

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut



wheel: P4S4P0N
wheel center:Polypropylene,black
tread: Solid rubber,black
plain bearing
without threadguard

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SWP58WC160P4S4P0N	160	135X110	105x84/76	11	52	195	175
SWP58WC200P4S4P0N	200	135X110	105x84/76	11	55	238	205

swivel castor back brake with hook	mm	mm	mm	mm	mm	mm	Kg
CWP58WC200P4S4P0N	200	135X110	105x84/76	11	55	238	205

swivel castor back brake with screw	mm	mm	mm	mm	mm	mm	Kg
AWP58WC160P4S4P0N	160	135X110	105x84/76	11	52	195	175
AWP58WC200P4S4P0N	200	135X110	105x84/76	11	55	238	205

wheel only	mm	mm	mm	mm	Ø	Kg
160P4S4P0N	160	50	60	20	M12	175
200P4S4P0N	200	50	60	20	M12	205

Housing made of pressed steel,
zinc plated,double ball bearing
swivel head,plastic ring
standard:wheel axle with nut

wheel: SBS4R0N
wheel centre:Steel
tread:solid rubber,black
roller bearing
without threadguard

swivel castor	mm	mm	mm	mm	mm	mm	Kg
SWP58WC200SBS4R0N	200	135X110	105x84/76	11	55	238	205

swivel castor back brake with hook	mm	mm	mm	mm	mm	mm	Kg
CWP58WC200SBS4R0N	200	135X110	105x84/76	11	55	238	205

swivel castor back brake with screw	mm	mm	mm	mm	mm	mm	Kg
AWP58WC200SBS4R0N	200	135X110	105x84/76	11	55	238	205

wheel only	mm	mm	mm	mm	Ø	Kg
200SBS4R0N	200	50	60	20	M12	205

wheels and axles for waste bins

wheel for waste bin	mm	mm	mm	mm	Ø	Kg
200P4S4Z0N	200	50				100

solid axle for waste bin	mm
A460SO	460
A552SO	552

semi-hollow axle for waste bin	mm	mm
A460SE20	460	2.0
A552SE20	552	2.0

hollow axle for waste bin	mm	mm
A460HO18 A552HO18	460 552	1.8
A460HO25 A552HO25	460 552	2.5

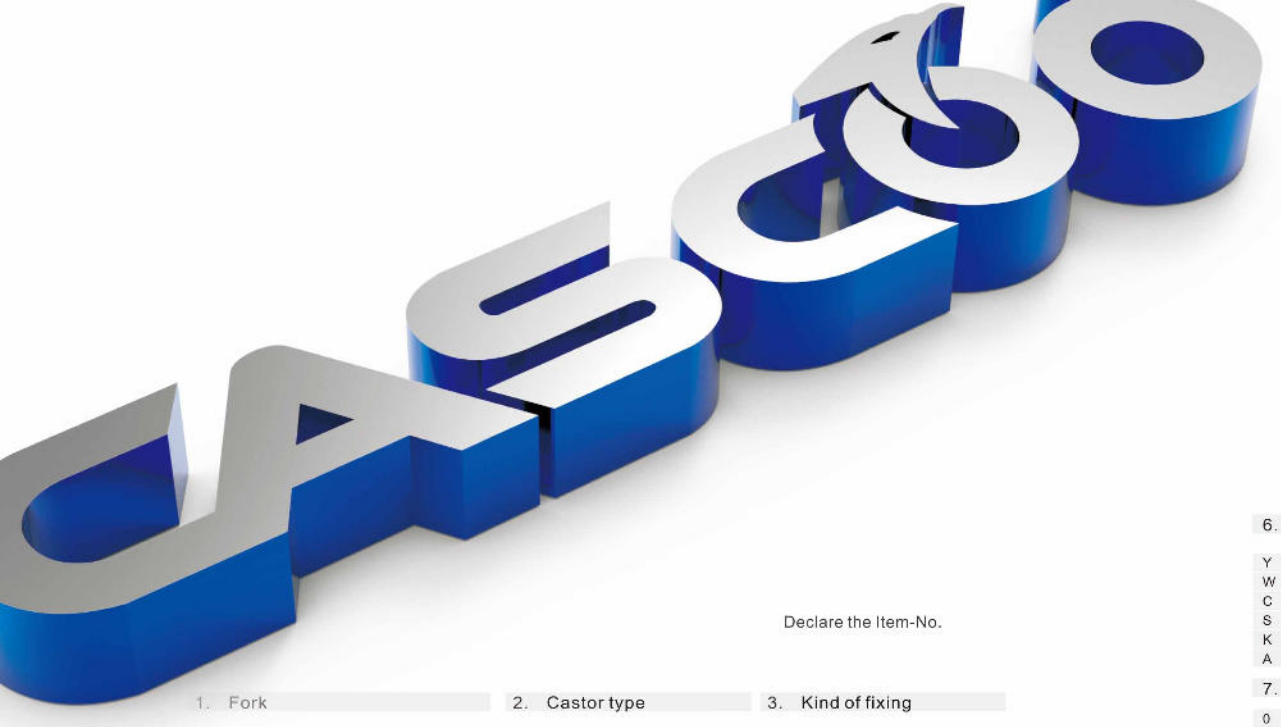

Declare the Item-No.

1. Fork

C	back brake for rubber
A	back brake with screw
K	brake with plastic pedal/ hole fitting
D	directional braked
F	fixed
H	hole fitting
B	hole fitting / total brake
E	hole fitting with directional bra.
S	swivel
T	swivel with total brake
P	swivel with total braked /plastic pedal

2. Castor type

A	apparatus castors
B	Cascoo Basics
P	Cascoo Premium
D	double swivel castors
H	heavy duty
E	shopping trolleys
S	special castors
T	transport castors with hole
W	waste bin

3. Kind of fixing

H	hole fitting
P	plate
S	screw
C	screw and ballb. with stage
B	screw and ballbearing
X	expander
Z	stem

4. Mounting size

when 3 = P

1	
2	80x60 mm / 42
3	80x60 mm / 52
4	105x80 mm /52
5	105x80 mm /60
6	80x60 mm strengthen / 42
7	80x60 mm closed / 42
8	85x60 mm/42
9	
0	
A	60x60 mm /
B	55x55 mm /
C	67x60 mm /
E	77x67 mm /
J	95x70 mm /

Hole/stem size

when 3 = H / Z / S / B / C

1	11 mm
2	12 mm
3	13 mm/42
4	14 mm
5	15 mm
6	16 mm
7	7 mm
8	13 mm/52
9	13 mm/60
0	10mm
A	13 mm/36 app.strengthened
B	13 mm/36 rivet
C	12,2mm
D	13mm/36 hexagonal
E	11mm/36 app. strengthened
F	11mm/36 rivet
G	11mm/36 hexagonal
H	11mm/44
J	11mm/56

5. Plate/fork thickness

1	3.00/2.50
2	2.00/2.00
3	3.00/3.00
4	4.00/4.00
5	2.50/2.50
6	2.50/2.00
7	4.00/3.00
8	3.50/3.00
9	2.00/1.80
0	2.00/1.50
A	3.50/3.50
B	4.00/3.50
C	1.50/1.50
D	3.00/2.00
E	5.00/4.00
F	2.75/2.25
G	1.80/1.80
H	1.50/2.00
J	2.00/2.50

6. Fork Surface treatment

Y	zinc yellow
W	zinc blue
C	zinc-chromatised
S	stainless steel
K	cathodic dip(KTL)
A	zinc blue and RAL9007

7. LOGO

0	Without Logo
C	Cascoo Logo

8.9.10. Wheel Ø

050	Ø 50 mm
075	Ø 75 mm
080	Ø 80 mm
100	Ø 100 mm
108	Ø 108 mm
125	Ø 125 mm
150	Ø 150 mm
160	Ø 160 mm
180	Ø 180 mm
200	Ø 200 mm
250	Ø 250 mm

11. Wheel center

A	Aluminum
B	Aluminum heavy duty
N	Polyamide A
R	Polyamide B
Y	Polyamide Basics version 8mm
Z	Polyamide Basics version steel tube version 8mm
H	Polyamide steel tube
P	Polypropylene
X	Polypropylene Basics version 8 mm
W	Polypropylene Basics version steel tube 8mm
Q	Polypropylene steel tube
U	Polyurethan
M	Sandwich polyamid/elastic
T	Sandwich polypropylene/TPR
S	Steel

12. wheel center color

0	white
1	blue
2	grey
3	yellow
4	black
5	brown
6	red
7	green
8	orange
9	special(see explanatory notes)
A	silver
B	zinc blue for waste bin castors
C	zinc-chromatised
W	zinc blue

13. Tread

F	Elastic big 70-75 shore
H	Elastic small 70-75 shore
E	Elastic standard 65 shore
N	Polyamid
P	Polypropylene
U	Polyurethan A
X	Polyurethan B
R	Rubber PAH Category 3
S	Rubber REACH-conform
W	TPR 85 Shore Transport trolley
A	TPR 85 Shore shopping
T	TPR 85 Shore apparatus
L	TPR electric conductable
V	TPR Rollcage 85 Shore

14. tread color

0	white
1	blue
2	grey
3	yellow
4	black
5	brown
6	red
7	green
8	orange
9	special

15. Bearing

B	single ball bearing
F	ball bearing frozen
S	ball bearing stainless
E	double ball bearing 6202
D	double ball bearing 6204
P	plain bearing
Z	plain bearing and plastic bush
R	roller bearing

16. Threadguard

0	without
1	small metal
2	big metal
3	small plastic
4	big plastic

17. Threadguard color

0	white
1	blue
2	grey
3	yellow
4	black
5	brown
6	red
7	green
8	orange
9	special
S	stainless steel
N	without
W	zinc blue
Y	zinc yellow
C	zinc-chromatised