FR 795 SCC SMT | Full Extension Progressive Action Drawer Slide

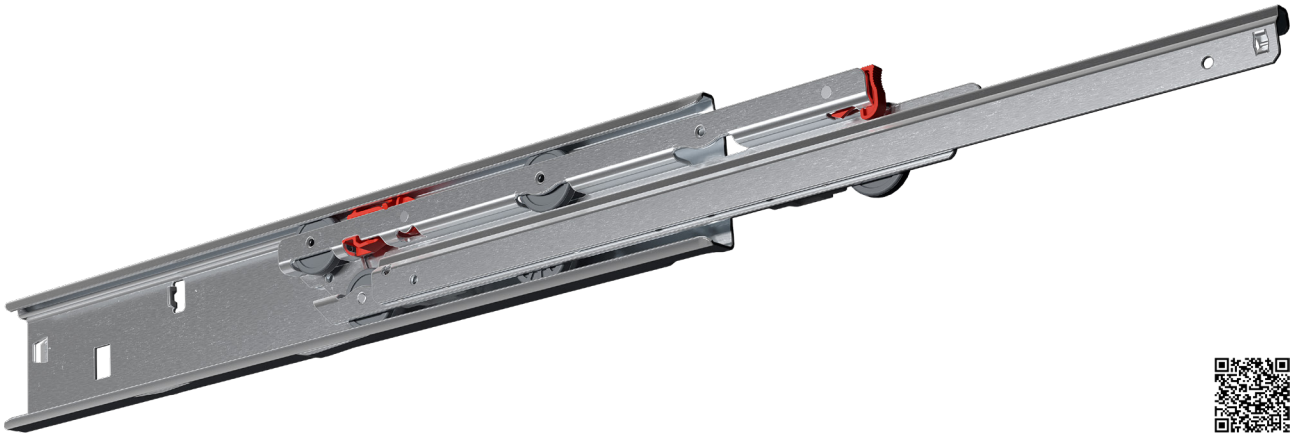

Specifications

- side mount
- 18.0 mm / 0.71 in.
- dynamic up to 70 kg / 154 lbs.
- solid synthetic rollers
- stainless steel 1.4509 / 441
- -25 °C to +80 °C
  -13 °F to +176 °F

Characteristics

- high lateral stability
- ideal running characteristic and smoothness of running through integrated progressive action
- integrated safety clip
- dual-sided captive profile
- synthetic stop
- self-closing
- compatible with regular extension drawer slide FR 1052 SCC SMT
- available as heat-resistant version up to +110 °C (+230 °F)
- Easy Close Device (ECD) can be ordered optionally, from length 350 mm (13.78 in.)

Mounting Type

- cabinet profile with bayonet mounting tabs and safety nose
- drawer profile without screw holes
- tool-less quick assembly of the cabinet profile

Dimensions



Length		Extension		Weight		Item No.	Item No.
				per set		PU 1	PU 2
mm	inch	mm	inch	kg	lbs.		
300	11.81	285	11.22	1.37	3.01	▸ 1024261002	1024261602
350	13.78	335	13.19	1.44	3.19	▸ 1024401002	▸ 1024401602
400	15.75	385	15.16	1.68	3.70	▸ 1024551002	▸ 1024551602
450	17.72	435	17.13	1.92	4.23	▸ 1024711002	▸ 1024711602
500	19.69	485	19.09	2.14	4.73	▸ 1024851002	▸ 1024851602
550	21.65	535	21.06	2.38	5.25	▸ 1025031002	▸ 1025031602
600	23.62	585	23.03	2.62	5.79	▸ 1025171002	▸ 1028901602
650	25.59	635	25.00	2.86	6.30	▸ 1025311002	▸ 1025311602
700	27.56	685	26.97	3.10	6.83	▸ 1028721002	1028261602
750	29.53	735	28.94	3.36	7.40	1028401002	1028401602

Packing Unit ▸ in stock

PU 1 – Sets assembled per Box, all Lengths: 5
PU 2 – 50 Sets, all 6 profiles individually packaged, 10 boxes
(4 x 25 cabinet profiles LEFT/RIGHT, 4 x 25 middle profiles LEFT/RIGHT, 2 x 50 drawer profiles LEFT/RIGHT)